

BYTECOM FANNER B.V.

 EMC REPORT

Prepared For :	BYTECOM FANNER B.V. Rondven 38, 6026PX Maarheeze The Netherlands
Product Name:	SWITCHING POWER SUPPLY
Model :	SP-ATX-420W-C1-PFC, SP-ATX-200W-E2, SP-ATX-420W-C1-E, SP-ATX-420W-E22, SP-ATX-500W-IR, SP-ATX-500W-E, OEM-ATX-500W-E1, OEM-ATX-500W-E
Prepared By :	TMC Rheinland Testing Services Co., Ltd 3F,Building 2,No.335 West of Zhuguang Road,Taoyuan Street,Nanshan District,Shenzhen,Guangdong,China
Test Date:	April 21 - April 25, 2011
Date of Report :	April 25, 2011
Report No.:	TMC20110425EC01

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	5
1. TEST RESULTS SUMMARY	6
2. GENERAL INFORMATION	7
2.1. Report information	7
2.2. Measurement Uncertainty	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration	8
3.3. Operating Condition of EUT	8
3.4. Support Equipment List.....	8
3.5. Test Conditions.....	8
3.6. Modifications.....	8
3.7. Abbreviations	9
3.8. Performance Criterion	9
4. TEST EQUIPMENT USED	10
4.1. For Conducted Emission Test	10
4.2. For Radiated Emission Measurement.....	10
4.3. For Harmonic / Flicker Test	10
4.4. For Electrostatic Discharge Immunity Test.....	10
4.5. For RF Strength Susceptibility Test	10
4.6. For Electrical Fast Transient/Burst Immunity Test	11
4.7. For Surge Test	11
4.8. For Injected Currents Susceptibility Test	11
4.9. For Magnetic Field Immunity Test.....	11
4.10. For Voltage Dips and Interruptions Test	11
5. CONDUCTED EMISSION TEST.....	12
5.1. Block Diagram of Test Setup	12
5.2. Test Standard.....	12
5.3. Conducted Emission Limit	12
5.4. EUT Configuration on Test.....	13
5.5. Operating Condition of EUT	13
5.6. Test Procedure.....	13
5.7. Test Result.....	13
6. RADIATED EMISSION TEST	14
6.1. Open Site Setup Diagram	14
6.2. Test Standard.....	14
6.3. Radiated Emission Limit	14
6.4. EUT Configuration on Test.....	15
6.5. Operating Condition of EUT	15
6.6. Test Procedure.....	15
6.7. Test Results	15
7. HARMONIC CURRENT EMISSION TEST	16
7.1. Block Diagram of Test Setup	16
7.2. Test Standard and Limit	16
7.3. Test Procedure.....	17
7.4. Test Results	17
8. VOLTAGE FLUCTUATIONS & FLICKER TEST.....	18

8.1. Block Diagram of Test Setup	18
8.2. Test Standard.....	18
8.3. Operating Condition of EUT	18
8.4. Test Results	18
9. ELECTROSTATIC DISCHARGE TEST.....	19
9.1. Block Diagram of ESD Test Setup.....	19
9.2. Test Standard.....	19
9.3. Severity Levels and Performance Criterion.....	19
9.4. EUT Configuration on Test.....	19
9.5. Operating Condition of EUT	19
9.6. Test Procedure.....	20
9.7. Test Results	20
10. RF FIELD STRENGTH SUSCEPTIBILITY TEST	22
10.1. R/S Test Setup	22
10.2. Test Standard.....	22
10.3. Severity Levels and Performance Criterion.....	22
10.4. EUT Configuration on Test.....	23
10.5. Operating Condition of EUT	23
10.6. Test Procedure	23
10.7. Test Results	23
11. ELECTRICAL FAST TRANSIENT/BURST TEST	25
11.1. EFT Test Setup	25
11.2. Test Standard.....	25
11.3. Severity Levels and Performance Criterion.....	25
11.4. EUT Configuration on Test.....	25
11.5. Operating Condition of EUT	25
11.6. Test Procedure	26
11.7. Test Results	26
12. SURGE TEST	28
12.1. Surge Test Setup	28
12.2. Test Standard.....	28
12.3. Severity Levels and Performance Criterion.....	28
12.4. EUT Configuration on Test.....	28
12.5. Operating Condition of EUT	28
12.6. Test Procedure.....	29
12.7. Test Results	29
13. INJECTED CURRENTS SUSCEPTIBILITY TEST	31
13.1. Block Diagram of Test AC Mains Setup.....	31
13.2. Test Standard.....	31
13.3. Severity Levels and Performance Criterion.....	31
13.4. EUT Configuration on Test.....	31
13.5. Operating Condition of EUT	31
13.6. Test Procedure	32
13.7. Test Results	32
14. VOLTAGE DIPS AND INTERRUPTIONS TEST	34
14.1. Voltage Dips and Interruptions Test Setup	34
14.2. Test Standard.....	34
14.3. Severity Levels and Performance Criterion.....	34
14.4. EUT Configuration on Test.....	34
14.5. Operating Condition of EUT	34

14.6. Test Procedure.....	35
14.7. Test Result.....	35
APPENDIX I	37
APPENDIX II	40
APPENDIX III.....	43

TEST REPORT DECLARATION

Applicant	:	BYTECOM FANNER B.V.
Address	:	Rondven 38, 6026PX Maarheeze The Netherlands
EUT Description	:	SWITCHING POWER SUPPLY
Model Number	:	SP-ATX-420W-C1-PFC, SP-ATX-200W-E2, SP-ATX-420W-C1-E, SP-ATX-420W-E22, SP-ATX-500W-IR, SP-ATX-500W-E, OEM-ATX-500W-E1, OEM-ATX-500W-E
Product Information	:	All models have the same constructions, circuit diagram and PCB layout. Only model name are different.

Test Standards:

EN 55022:2006+A2:2010,
EN 61000-3-2:2006+A2:2009
EN 61000-3-3:2008
EN 55024:1998+A2:2003

The EUT described above is tested by **TMC Rheinland Testing Services Co., Ltd** EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. **TMC Rheinland Testing Services Co., Ltd** EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the **2004/108/EC** directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Mike Yong

Prepared by :

Assistant

Hellen Xiao

Reviewer :

Supervisor

Jones Song

Approved & Authorized Signer :

Jones song/ Manager

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Radiated Emission	PASS
Conducted Disturbance	PASS
Harmonic Current	PASS
Voltage Fluctuation and Flicker	PASS
Electrostatic Discharge Immunity	PASS
Radiated Electromagnetic Fields Immunity	PASS
Electric Fast Transient Burst Immunity	PASS
Surge Immunity	PASS
Injected currents susceptibility test	PASS
Voltage dips and interruptions Immunity	PASS

2. GENERAL INFORMATION

2.1. Report information

2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that TMC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that TMC in any way guarantees the later performance of the product/equipment.

2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, TMC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through TMC, unless the applicant has authorized TMC in writing to do so.

2.2. Measurement Uncertainty


Available upon request.

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description	:	SWITCHING POWER SUPPLY
Applicant	:	BYTECOM FANNER B.V. Rondven 38, 6026PX Maarheeze The Netherlands
Manufacturer	:	SPIRE CORP. FL7/8 Building B houhai Blvd Dongjiaotou Industrial Park Shekou,Nanshan 518067 Shenzhen,China
Model Number	:	SP-ATX-420W-C1-PFC, SP-ATX-200W-E2, SP-ATX-420W-C1-E, SP-ATX-420W-E22, SP-ATX-500W-IR, SP-ATX-500W-E, OEM-ATX-500W-E1, OEM-ATX-500W-E

3.2. Block Diagram of EUT Configuration



3.3. Operating Condition of EUT

Test mode : RUNNING

3.4. Support Equipment List

Manufacturer	Description	Model	Serial Number
-	-	-	-

3.5. Test Conditions

Temperature: 23-26℃

Relative Humidity: 55-68 %

3.6. Modifications

No modification was made.

3.7. Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

3.8. Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	Jun. 01, 2011	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Jun. 01, 2011	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	Jun. 01, 2011	1 Year
4.	Conical	Emtek	N/A	N/A	N/A	N/A
5.	Voltage Probe	Schwarzbeck	TK9416	N/A	Jun. 01.2011	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6100214550	Jun. 01, 2011	1 Year
7.	CDN	SCHAFFNER	CDN T200	16891	Jun. 01.2011	1 Year
8.	CDN	SCHAFFNER	CDN T400	16913	Jun. 01, 2011	1 Year

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Jun 01,2011	1 Year
2.	Test Receiver	Rohde&Schwarz	ESC830	828982/018	Jun 01,2011	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Jun 01,2011	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Jun 01,2011	1 Year
5.	Cable	Schwarzbeck	AK9513	ACRX1	Jun 01,2011	1 Year
6.	Cable	Rosenberger	N/A	FR2RX2	Jun 01,2011	1 Year
7.	Cable	Schwarzbeck	AK9513	CRRX2	Jun 01,2011	1 Year
8.	Cable	Schwarzbeck	AK9513	CRRX2	Jun 01,2011	1 Year
9.	Signal Generator	HP	864A	3625U00573	Jun 01,2011	1 Year

4.3. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power Frequency test system	HAEFELY	PHF555	080419-03	Jun. 01, 2011	1 Year

4.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PSD 1600	H911'292	Jun. 02, 2011	1 Year

4.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	Jun. 03, 2011	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	Jun. 03, 2011	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

4.6. For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	Jun. 01, 2011	1 Year

4.7. For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Jun. 01, 2011	1 Year

4.8. For Injected Currents Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	Jun. 01, 2011	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	Jun. 01, 2011	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	Jun. 01, 2011	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Jun. 01, 2011	1 Year
5.	Attenuator	EMTEST	ATT6	0010222a	Jun. 01, 2011	1 Year

4.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	Jun. 01, 2011	1 Year

4.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
2.	Dips Tester	HEAFELY	PLINE 1610	083732-18	Jun. 01, 2011	1 Year

5. CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

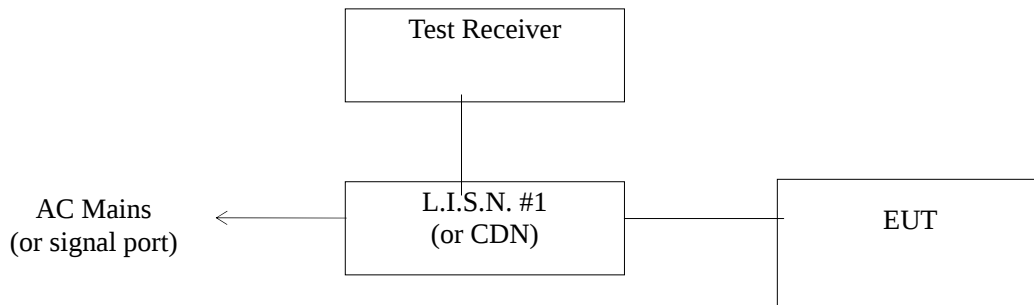

5.2. Test Standard

EN 55022:2006+A2:2010

5.3. Conducted Emission Limit

For the mains ports

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

For telecommunication ports

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	84 ~ 74	74 ~ 64
0.50 ~ 30.00	74	64

NOTE 1: The limits decrease linearly with the logarithm of the frequency in the range 0,15 MHz to 0,5 MHz.

NOTE 2 :The current and voltage disturbance limits are derived for use with an impedance stabilization network(ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / I = 44$ dB).

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55022 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1.EUT Information

Model Number : **SP-ATX-420W-C1-PFC**
Manufacturer : **SPIRE CORP.**

5.5. Operating Condition of EUT

5.5.1.Setup the EUT and simulators as shown in Section 5.1.

5.5.2.Turn on the power of all equipments.

5.5.3.Let the EUT work in test modes (EUT WORKING) and test it.

5.6. Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.


5.7. Test Result

PASS

The frequency range from 150 KHz to 30 MHz is investigated. and all the scanning waveform is put in **Appendix I**.

6. RADIATED EMISSION TEST

6.1. Open Site Setup Diagram

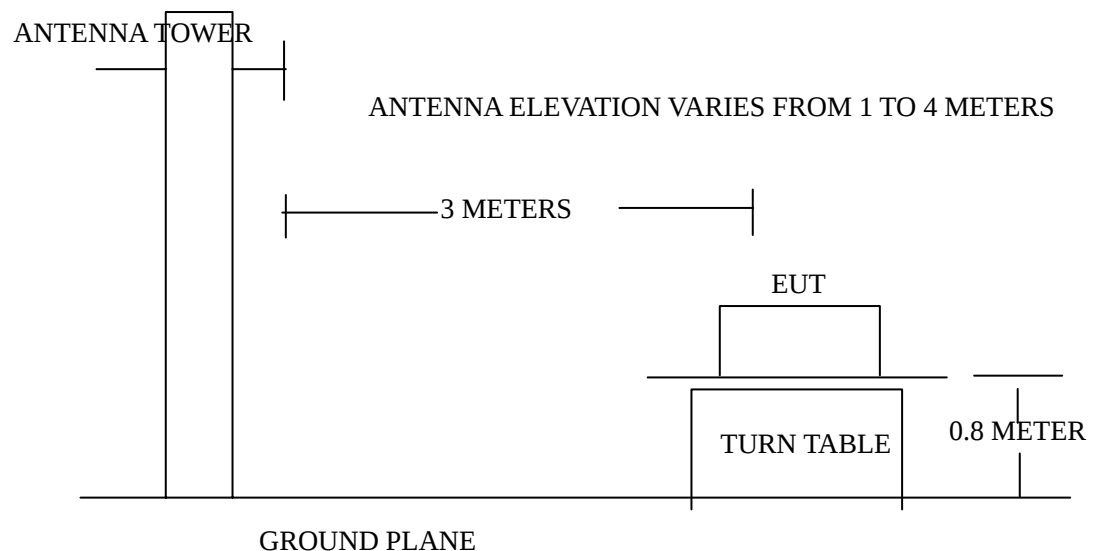

6.2. Test Standard

EN 55022:2006+A2:2010

6.3. Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note:(1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

FREQUENCY (GHz)	DISTANCE (Meters)	Average limit (dB μ V/m)	Peak limit (dB μ V/m)
1 ~ 3	3	50	70
3 ~ 6	3	54	74

Note :The lower limit applies at the transition frequency.

6.4. EUT Configuration on Test

The EN55022 Class B regulations test method must be used to find the maximum emission during radiated emission test.

6.5. Operating Condition of EUT

6.5.1. Setup the EUT as shown on Section 5.1.

6.5.2. Turn on the power of all equipments.

6.5.3. Let the EUT work in test mode and measure it.

6.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESCS20) is 120 KHz.

The EUT is tested in Anechoic Chamber.

6.7. Test Results


PASS.

The EUT is tested in Semi-Anechoic Chamber. and all the scanning waveform is put in

Appendix II.

7. HARMONIC CURRENT EMISSION TEST

7.1. Block Diagram of Test Setup



7.2. Test Standard and Limit

7.2.1. Test Standard

EN61000-3-2: 2006+A2:2009

7.2.2. Limits

Table 12 Harmonic Current Test Limit (Class A)

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15 \times 15/n$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23 \times 8/n$

7.3. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

7.4. Test Results

PASS

8. VOLTAGE FLUCTUATIONS & FLICKER TEST

8.1. Block Diagram of Test Setup

Same as Section 7.1..

8.2. Test Standard

EN61000-3-3:2008

8.3. Operating Condition of EUT

Same as Section 7.3.. The power cord of the EUT is connected to the output of the test system.
Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit


Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

8.4. Test Results

PASS

9. ELECTROSTATIC DISCHARGE TEST

9.1. Block Diagram of ESD Test Setup

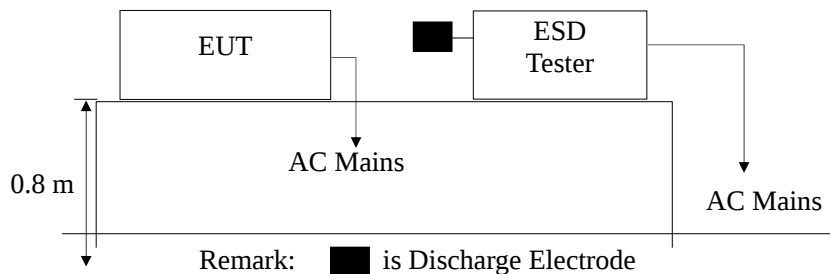

9.2. Test Standard

EN 55024:1998+ A2:2003

Severity Level 3 for Air Discharge at 8KV

Severity Level 2 for Contact Discharge at 4KV

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

9.3.2. Performance criterion: B

9.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT as shown in Section 9.1.

9.5.2. Turn on the power of all equipments.

9.5.3. Let the EUT work in test mode (full load) and test it.

9.6. Test Procedure

9.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.6.2. Contact Discharge:

All the procedure shall be same as Section 9.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

9.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.7. Test Results

PASS.

Please refer to the following page.

Electrostatic Discharge Test Results


TMC Rheinland Testing Services Co., Ltd

Applicant	BYTECOM FANNER B.V.	Test Date	: April 24, 2011
EUT	SWITCHING POWER SUPPLY	Temperature	: 22 °C
M/N	SP-ATX-420W-C1-PFC	Humidity	: 50 %
Power Supply	AC 230V/50Hz	Test Mode	: Max Load
Test Engineer	Mike Yong		
Air Discharge: $\pm 8\text{KV}$ For each point positive 10 times and negative 10 times discharge.			
Contact Discharge: $\pm 4\text{KV}$			
Location		Kind (A-Air Discharge C-Contact Discharge)	Result (PASS)
surface Slots	15 points	Air Discharge	A
Metal Parts	10 points	Contact Discharge	A
HCP	8 points	Contact Discharge	A
VCP	8 points	Contact Discharge	A

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

10.RF FIELD STRENGTH SUSCEPTIBILITY TEST

10.1.R/S Test Setup

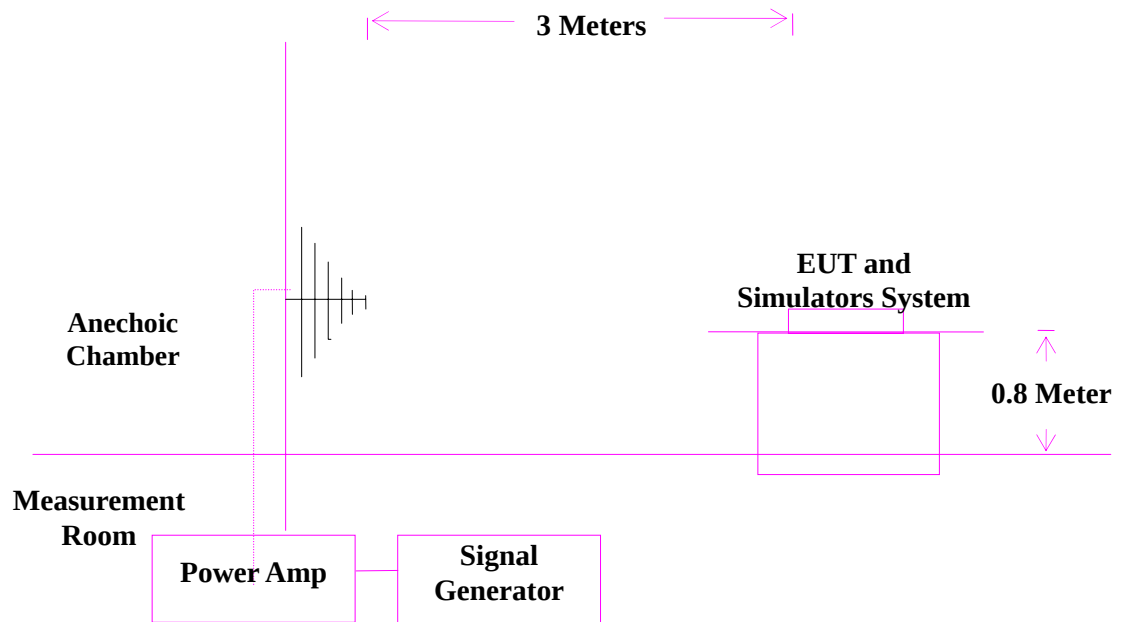

10.2.Test Standard

EN 55024:1998+ A2:2003
Severity Level 2 at 3V / m

10.3.Severity Levels and Performance Criterion

10.3.1.Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

10.3.2.Performance criterion : A

10.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

10.5.Operating Condition of EUT

Setup the EUT as shown in Section 10.1.. The operating condition of EUT are listed in section 3.3.

10.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor the EUT.

All the scanning conditions are as follows :

Condition of Test	Remarks
-----	-----
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	1 Sec.

10.7.Test Results

PASS.

Please refer to the following page.


RF Field Strength Susceptibility Test Results

TMC Rheinland Testing Services Co., Ltd

Applicant	: BYTECOM FANNER B.V.	Test Date	: April 24, 2011
EUT	: SWITCHING POWER SUPPLY	Temperature	: 22 °C
M/N	: SP-ATX-420W-C1-PFC	Humidity	: 50 %
Power Supply	: AC 230V/50Hz	Test Mode	: Max Load
Test Engineer	: Mike Yong	Frequency Range	: 80 MHz to 1000 MHz
Modulation: ☒ AM ☐ Pulse ☐ none 1 KHz 80%			
Criterion : A			
	Frequency Rang : 80-1000		
Steps	1%	1%	
	Horizontal	Vertical	
Front	A(pass)	A(pass)	
Right	A(pass)	A(pass)	
Rear	A(pass)	A(pass)	
Left	A(pass)	A(pass)	

11.ELECTRICAL FAST TRANSIENT/BURST TEST

11.1.EFT Test Setup

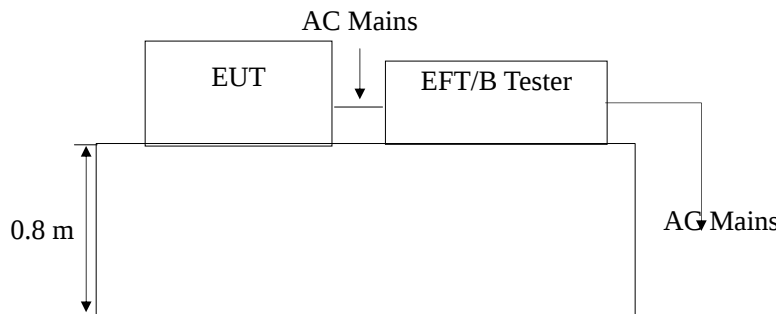

11.2.Test Standard

EN 55024:1998+ A2:2003

Severity Level 2 at 1KV

11.3.Severity Levels and Performance Criterion

11.3.1.Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

11.3.2.Performance criterion : B

11.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

11.5.Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.

11.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

11.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

11.6.2. For signal lines and control lines ports:

It's necessary to test.

11.6.3. For DC output line ports:

It's unnecessary to test.

11.7. Test Results

PASS


Electrical Fast Transient/Burst Test Results

TMC Rheinland Testing Services Co., Ltd

Applicant		: BYTECOM FANNER B.V.			Test Date		: April 24, 2011		
EUT		: SWITCHING POWER SUPPLY			Temperature		: 22 °C		
M/N		: SP-ATX-420W-C1-PFC			Humidity		: 50 %		
Power Supply		: AC 230V/50Hz			Test Mode		: Max Load		
Test Engineer		: Mike Yong							
Inject Place : AC Mains					Inject Place : Signal Ports				
Inject Line	Voltage KV	Inject Time(s)	Inject Method	Results (pass)	Inject Line	Voltage KV	Inject Time(s)	Inject Method	Results (pass)
L	±1	120	Direct	A					
N	±1	120	Direct	A					
L N	±1	120	Direct	A					

12.SURGE TEST

12.1.Surge Test Setup

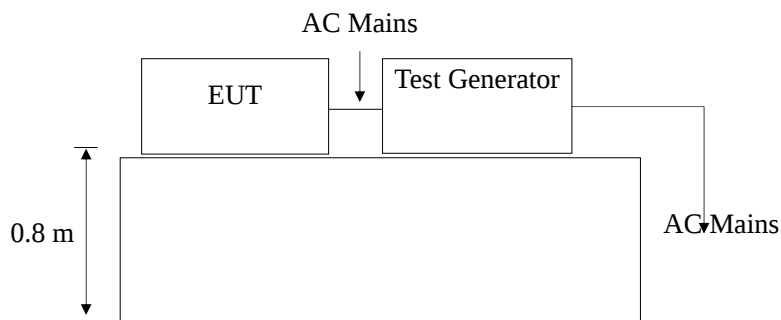

12.2.Test Standard

EN 55024:1998+ A2:2003

Severity Level 2 for Line to Neutral at 1.0KV

12.3.Severity Levels and Performance Criterion

12.3.1.Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion : **C**

12.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

12.5.Operating Condition of EUT

12.5.1.Setup the EUT as shown in Section 12.1..

12.5.2.Turn on the power of all equipments.

12.5.3.Let the EUT work in test mode (Full load) and test it.

12.6. Test Procedure

- 1) Setup the EUT and test generator as shown on Section 12.1.
- 2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7. Test Results

PASS


Surge Immunity Test Results

TMC Rheinland Testing Services Co., Ltd

Applicant	BYTECOM FANNER B.V.			Test Date	:	April 24, 2011
EUT	SWITCHING POWER SUPPLY			Temperature	:	22 °C
M/N	SP-ATX-420W-C1-PFC			Humidity	:	50 %
Power Supply	AC 230V/50Hz			Test Mode	:	Max Load
Test Engineer	Mike Yong					
Location	Polarity	Phase Angle	No of Pulse	Pulse Voltage (KV)		Result (pass)
L-N	+	0	5	1.0		A
L-N	+	90	5	1.0		A
L-N	+	180	5	1.0		A
L-N	+	270	5	1.0		A
L-N	-	0	5	1.0		A
L-N	-	90	5	1.0		A
L-N	-	180	5	1.0		A
L-N	-	270	5	1.0		A

13.INJECTED CURRENTS SUSCEPTIBILITY TEST

13.1.Block Diagram of Test AC Mains Setup

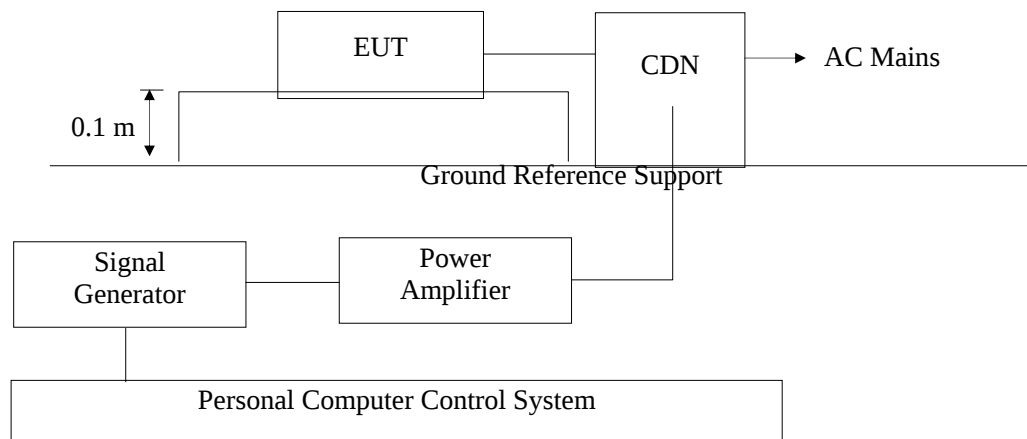

13.2.Test Standard

EN 55024:1998+ A2:2003

Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

13.3.Severity Levels and Performance Criterion

13.3.1.Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

13.3.2.Performance criterion: A

13.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

13.5.Operating Condition of EUT

Setup the EUT as shown in Section 13.1.. The operating condition of EUT are listed in section 3.3

13.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 13.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.7. Test Results

PASS


Injected Currents Susceptibility Test Results

TMC Rheinland Testing Services Co., Ltd

Applicant	: BYTECOM FANNER B.V.	Test Date	:	April 24, 2011
EUT	: SWITCHING POWER SUPPLY	Temperature	:	22 °C
M/N	: SP-ATX-420W-C1-PFC	Humidity	:	50 %
Power Supply	: AC 230V/50Hz	Test Mode	:	Max Load
Test Engineer	: Mike Yong			
Frequency Range (MHz)	Injected Position	Strength	Criterion	Result
0.15 ~ 80	AC Line	3V(rms), Unmodulated	A	PASS

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Voltage Dips and Interruptions Test Setup

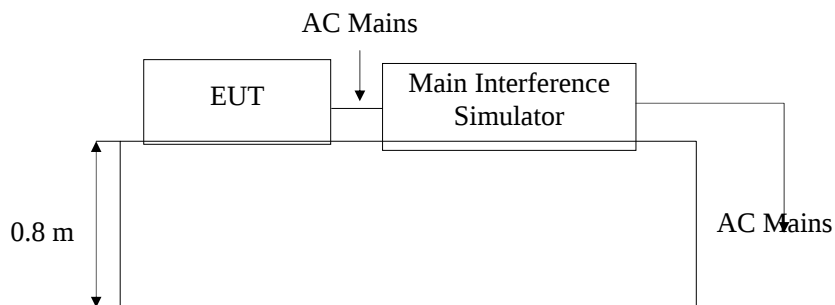

Remark: Combination wave generator and decoupling network are included in test generator.

14.2. Test Standard

EN 55024:1998+ A2:2003

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Test Level %U _T	Voltage dip and short interruptions %U _T	Duration (in period)
5	95	0.5p
70	30	25p
5	95	250p

14.3.2. Performance criterion : C & B

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

14.5. Operating Condition of EUT

14.5.1. Setup the EUT as shown in Section 14.1.

14.5.2. Turn on the power of all equipments.

14.5.3. Let the EUT work in test mode (SPEAKERS Playing) and test it.

14.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 14.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.7. Test Result


PASS

Voltage Dips And Interruptions Test Results

TMC Rheinland Testing Services Co., Ltd

Applicant	BYTECOM FANNER B.V.		Test Date	:	April 24, 2011
EUT	SWITCHING POWER SUPPLY		Temperature	:	22 °C
M/N	SP-ATX-420W-C1-PFC		Humidity	:	50 %
Power Supply	AC 230V/50Hz		Test Mode	:	Max Load
Test Engineer	Mike Yong				
Test Level % U_T	Voltage Dips & Short Interruptions % U_T	Duration (in period)	Phase Angle	Criterion	Result
5	95	0.5P	0° ~360°	C	PASS
70	30	25P	0° ~360°	B	PASS
5	95	250P	0° ~360°	C	PASS

APPENDIX I

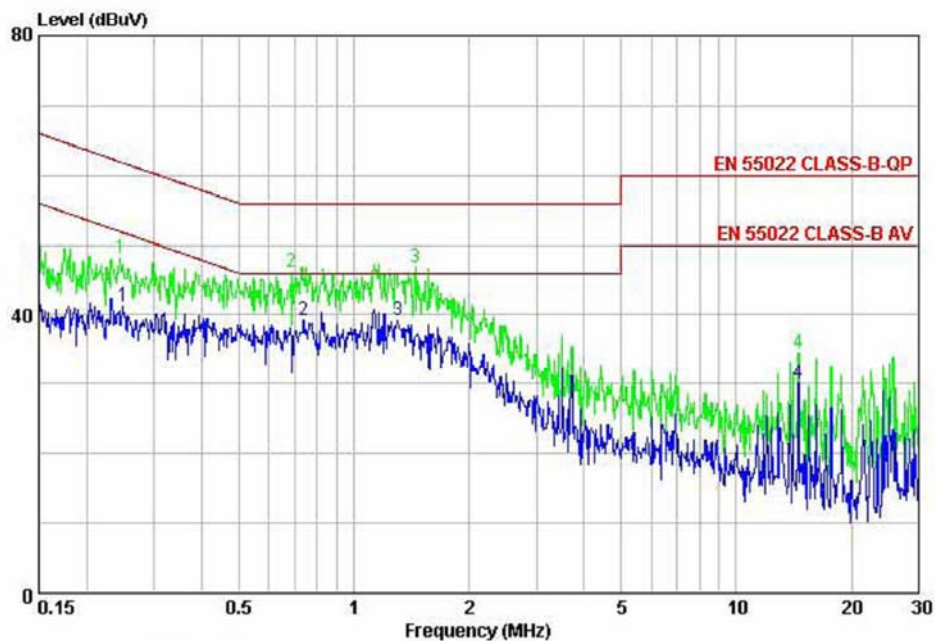

Condition


: EN 55022 CLASS-B-QP LINE
: RBW:9.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over		
	MHz	dBuV	dBuV	dB	Remark	Pol/Phase
1	0.25	41.33	51.78	-10.45	Average	LINE
2	0.74	39.20	46.00	-6.80	Average	LINE
3 max	1.30	39.23	46.00	-6.77	Average	LINE
4	14.59	30.18	50.00	-19.82	Average	LINE

Condition

: EN 55022 CLASS-B-QP LINE
: RBW:9.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over		
	MHz	dBuV	dBuV	dB	Remark	Pol/Phase
1	0.24	48.21	61.95	-13.74	Peak	LINE
2	0.69	46.07	56.00	-9.93	Peak	LINE
3 max	1.45	46.79	56.00	-9.21	Peak	LINE
4	14.59	34.48	60.00	-25.52	Peak	LINE

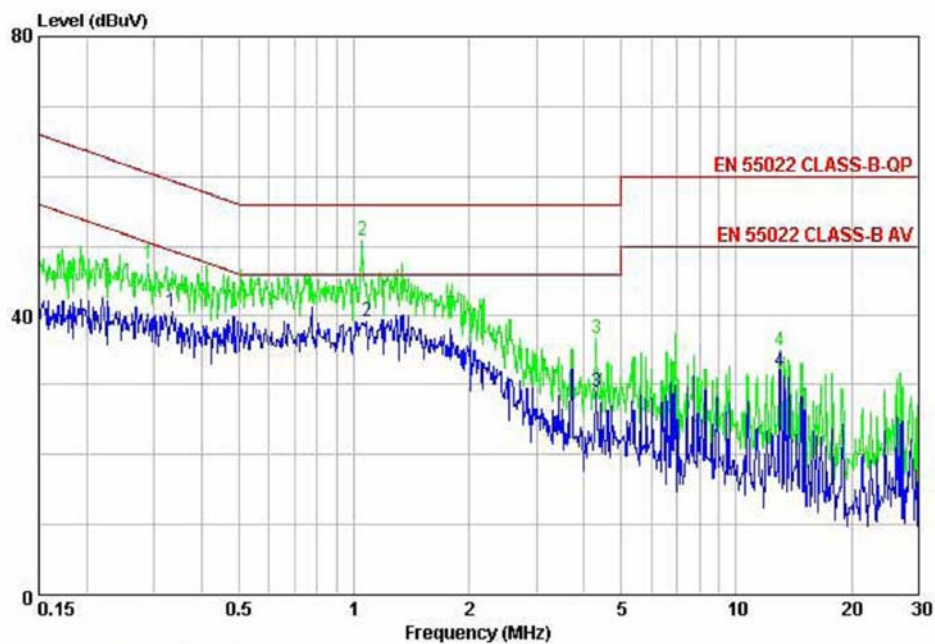

Condition

: EN 55022 CLASS-B-QP NEUTRAL
: RBW:9.000kHz VBW:300.000kHz SWT:Auto


	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.33	40.55	49.35	-8.80	Average	NEUTRAL
2 max	1.08	39.31	46.00	-6.69	Average	NEUTRAL
3	4.31	28.87	46.00	-17.13	Average	NEUTRAL
4	13.06	31.98	50.00	-18.02	Average	NEUTRAL

Condition

: EN 55022 CLASS-B-QP NEUTRAL
: RBW:9.000kHz VBW:300.000kHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.29	47.56	60.54	-12.98	Peak	NEUTRAL
2 max	1.05	50.71	56.00	-5.29	Peak	NEUTRAL
3	4.31	36.71	56.00	-19.29	Peak	NEUTRAL
4	13.06	34.97	60.00	-25.03	Peak	NEUTRAL


APPENDIX II

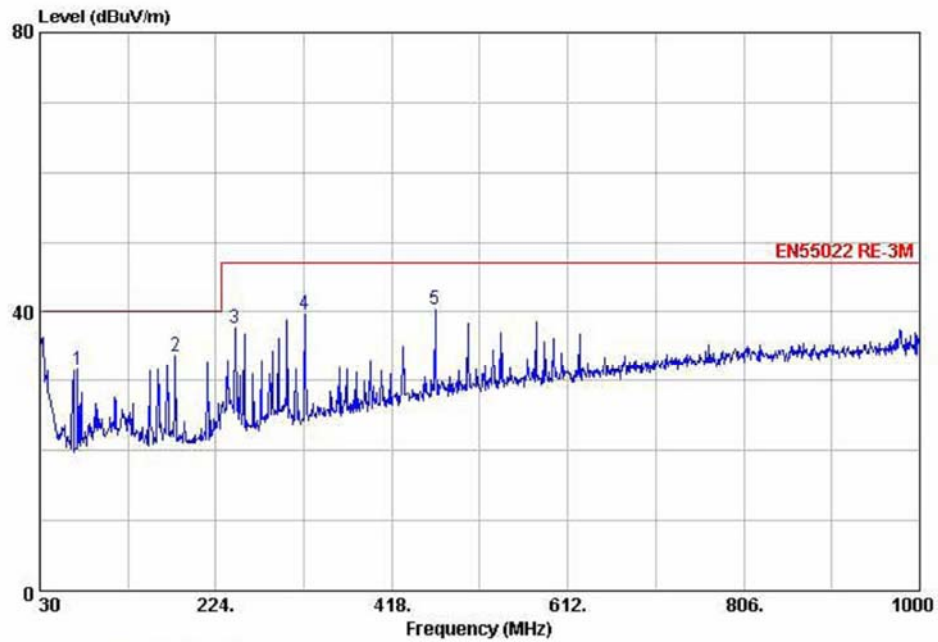

Condition

: EN55022 RE-3M 3m HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	71.71	31.68	40.00	-8.32	Peak	HORIZONTAL
2 max	179.38	33.63	40.00	-6.37	Peak	HORIZONTAL
3	245.34	37.75	47.00	-9.25	Peak	HORIZONTAL
4	321.97	39.77	47.00	-7.23	Peak	HORIZONTAL
5	465.53	40.32	47.00	-6.68	Peak	HORIZONTAL

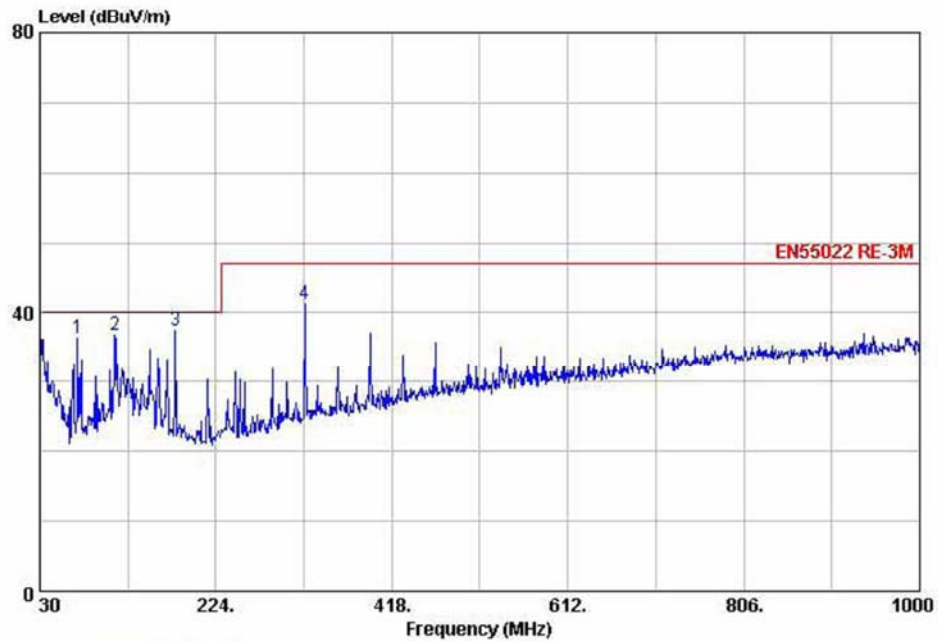

Condition

: EN55022 RE-3M 3m VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	71.71	36.23	40.00	-3.77	Peak	VERTICAL
2	112.45	36.73	40.00	-3.27	Peak	VERTICAL
3 max	179.38	37.35	40.00	-2.65	Peak	VERTICAL
4	321.97	41.23	47.00	-5.77	Peak	VERTICAL

APPENDIX III

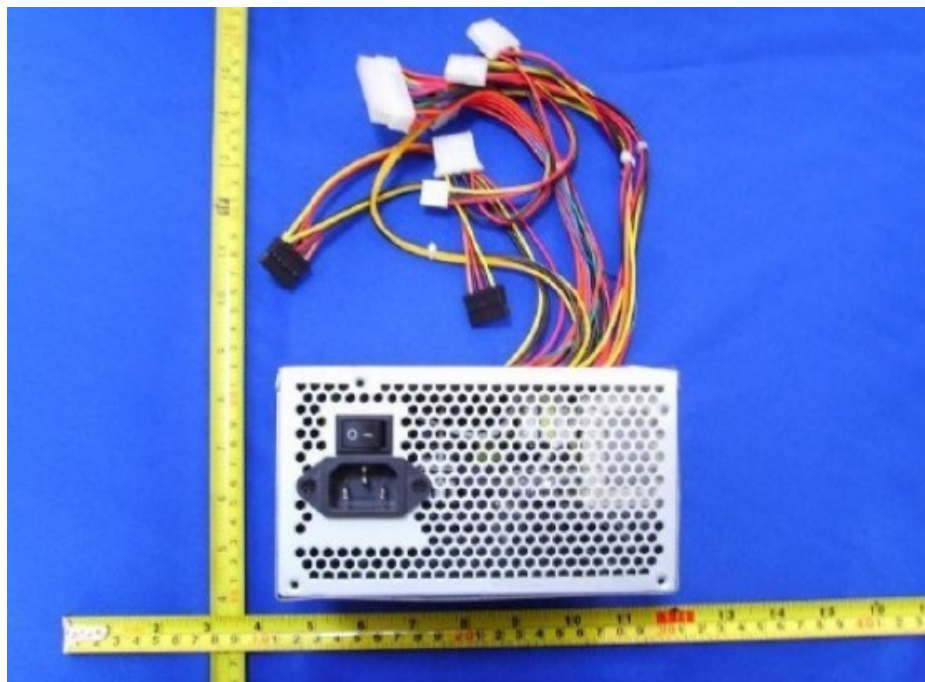
Photo 1 General Appearance of the EUT**Photo 2 General Appearance of the EUT**

Photo 3 General Appearance of the EUT (Inside)



Photo 4 General Appearance of the EUT (Inside)

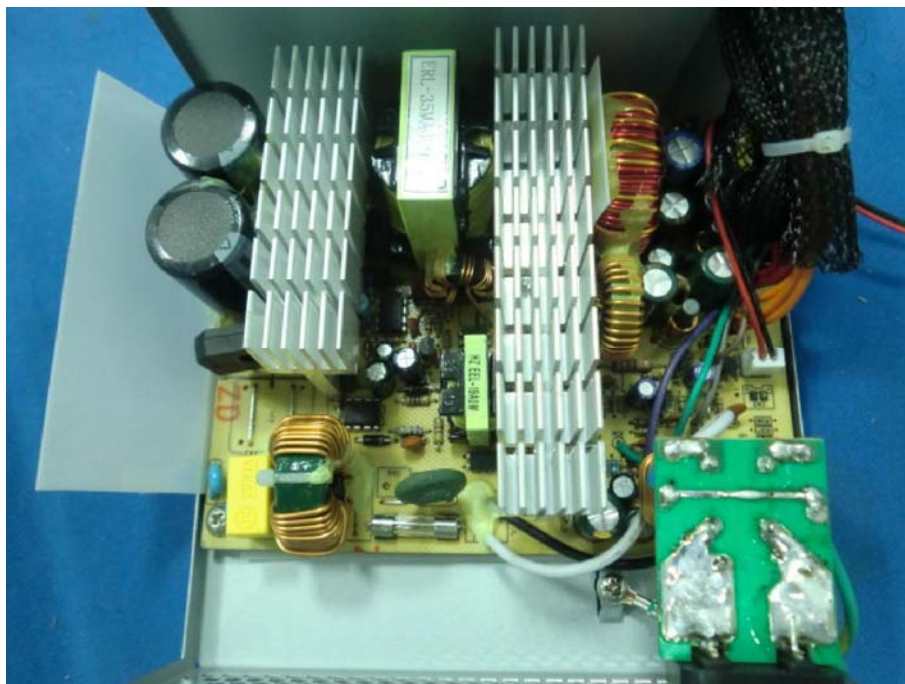


Photo 5 Test scene



Photo 6 Test scene



*****END OF REPORT*****