



APPROVAL SHEET

Cooling Fan

SALES MODEL NO: SP04020S1M3

ENGINEER NO: SF04020S1M303



Article No. : SP-AP-SC-A184 Issue Date : Sep.20 , 2008 Version : A/0	Audited by
--	------------

Checked by	Drafted by
------------	------------

Spire Corp.

Tel.: +86-755-26801568 Fax: +86-755-26801561

[Http://www.spirecoolers.com](http://www.spirecoolers.com)

[Http://www.spirepower.com](http://www.spirepower.com)

[Http://www.spire-corp.com](http://www.spire-corp.com)



Spire Corp.

Approval Sheet Revisement Record

SALES MODEL NO: SP04020S1M3

ENGINEER NO: SF04020S1M303

Article No: SP-AP-SC-A184

Version	Revised Chapter	Description	Revised Date	Drafted by	Audited by	ECN No.
A/0	N/A	First Version	2008-09-20			N/A



Contents

1. Multi views and images.....	4
2. Fan Drawing.....	5
3. Airflow Image.....	6
4. Fan Specification.....	7
5. Correlative Certification compliance.....	8



Spire Corp.

1. Multi views and images



Picture 1 : Full view



Picture 2 : Top view



Picture 3 : Base view



Picture 4 : Side view



Picture 5: Fan Label




Picture6: 2510/3 pin




Spire Corp.

2 .Fan Drawing

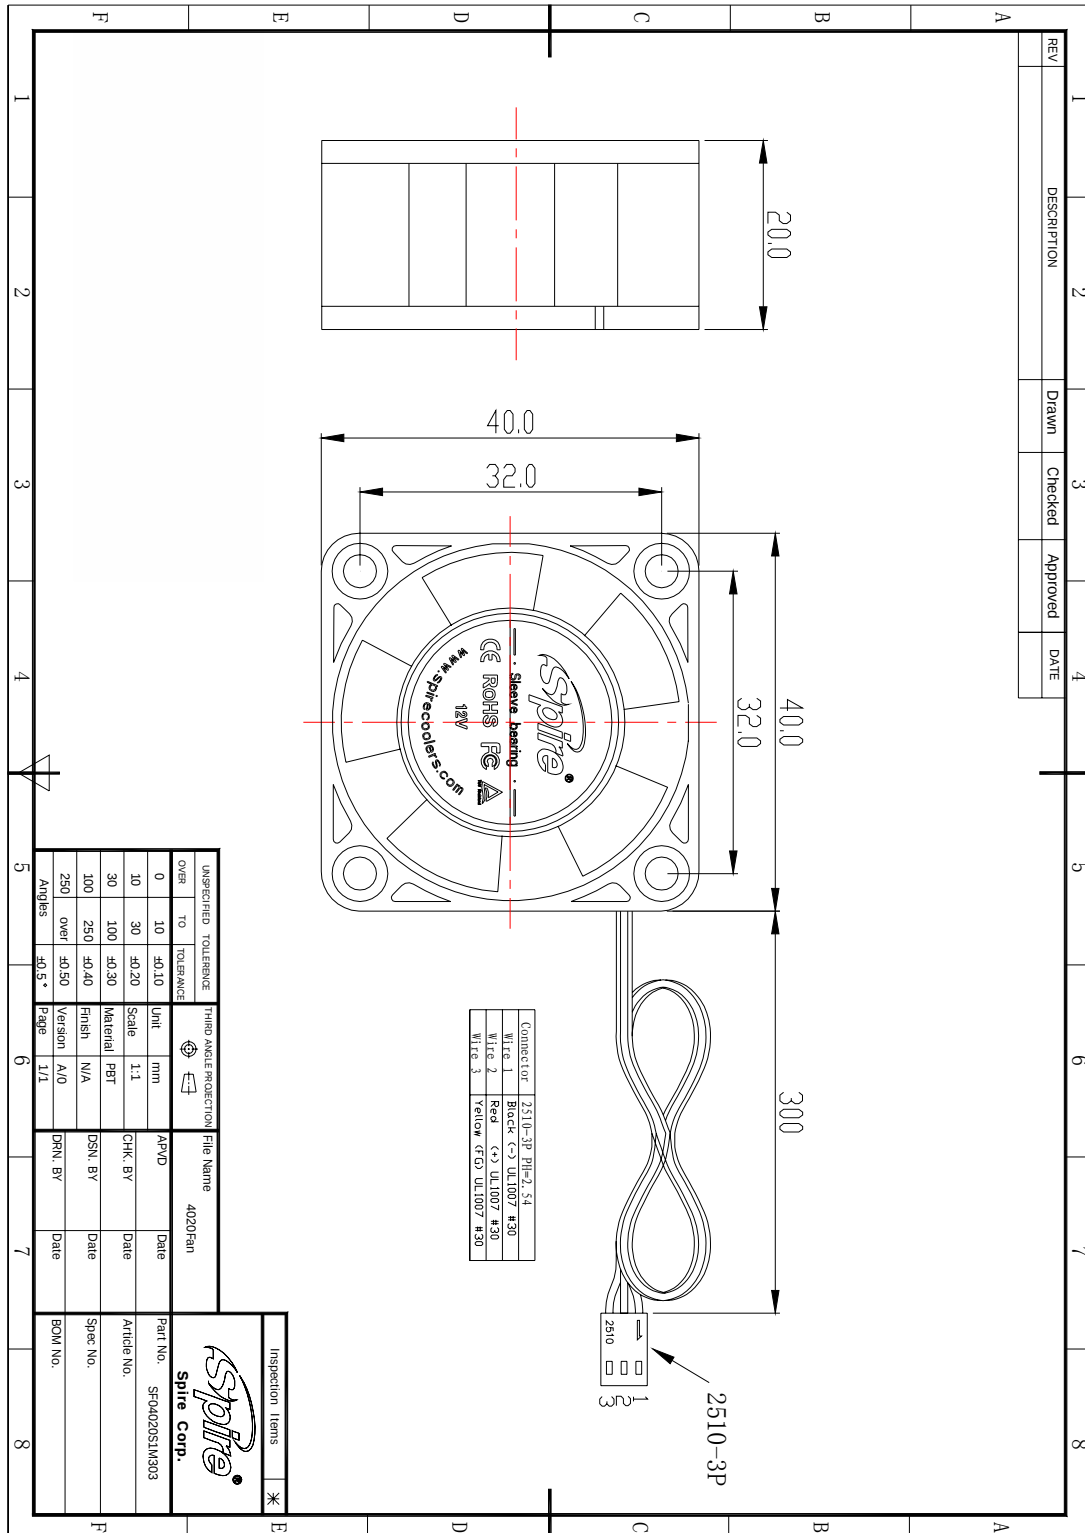



3. Airflow Image

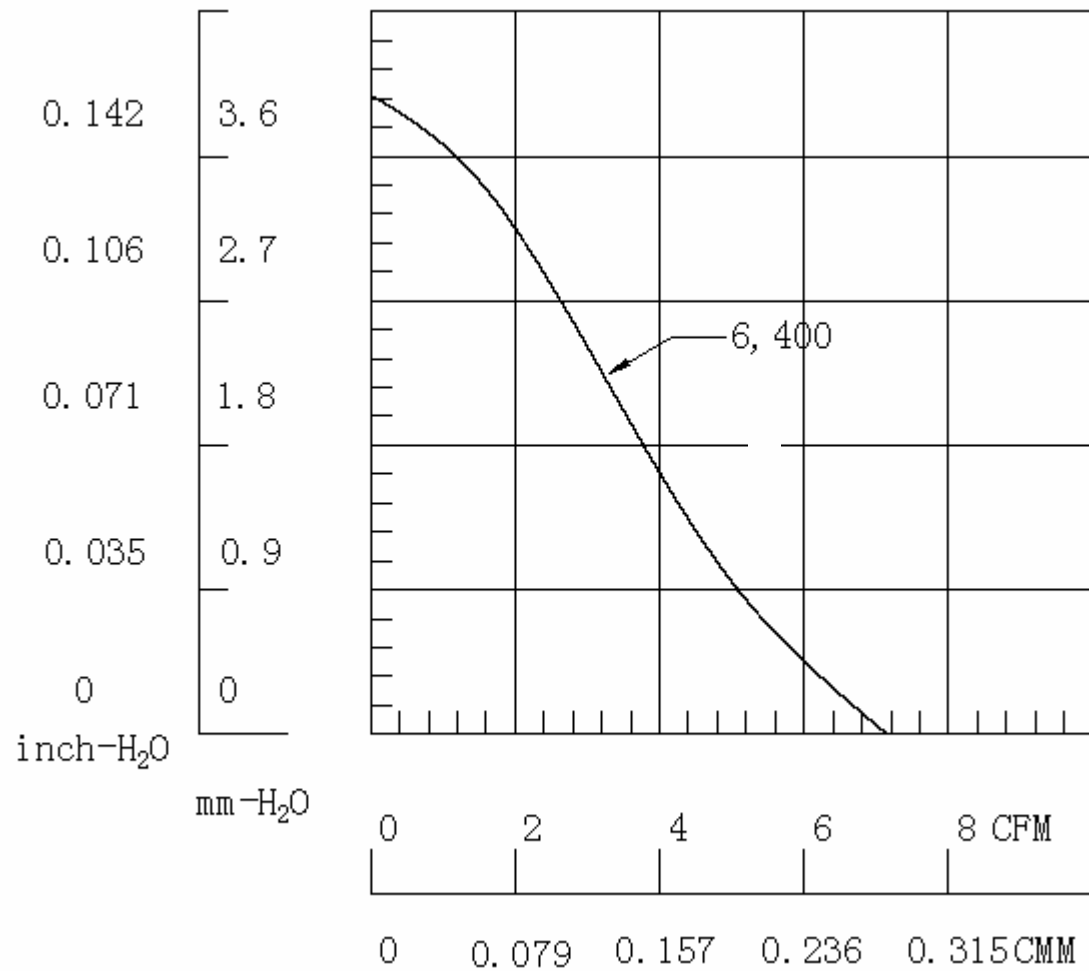



4.Fan Specification:

FAN MODEL: SF04020S1M303

1. Rated Voltage	: 12VDC
2. Operating Voltage Range	: 10.2 ~13.8VDC
3. Rated Speed	: 6400RPM $\pm$ 10%
4. Max Static Pressure	: 3.98mm-H ₂ O
5. Max Air Flow	: 7.15CFM at 6400RPM
6. Max Rated Current	: 0.12 AMP
7. Max Rated Power	: 1.44 WATTS
8. Max Noise Level	: 26.0 dB(A) at 6400RPM
9. Operating Temperature	: -10 to 70 Deg. C
10. Storage Temperature	: -40 to 70 Deg. C
11. Bearing System	: Sleeve Bearing
12. Life hours	: 30,000
13. Connector	: 2510/3 pin
14. Weight	: 26g



5. Correlative Certification compliance

Item #	Certification type	Certification Number	Certification listing	Remark
1	EMC	BCT07LC-807E	www.bontek.com.cn	
2	LVD	BCT07LC-807S	www.bontek.com.cn	
3	FCC	ASZ08041007FK	www.aovt.com	
4	ROHS	GZ0803038947A/CHEM	www.rohs.cn.com	
5	TUV	R50131773	www.sz.chn.tuv.com	