



APPROVAL SHEET

Cooling fan

SALES MODEL NO: SP08025S1H4-1-LED-2P

ENGINEER NO: SF08025S1H4-1-LED-2P



Article No. : SP-AP-SC-A322 Issue Date : Aug 11, 2010 Version : A/0	Audited by
Checked by	Drafted by

Spire Corp.

Tel.: +86-755-33823311 Fax: +86-755-33823314

[Http://www.spirecoolers.com](http://www.spirecoolers.com)

[Http://www.spirepower.com](http://www.spirepower.com)

[Http://www.spire-corp.com](http://www.spire-corp.com)



Spire Corp.

Approval Sheet Revisement Record

SALES MODEL NO: SP08025S1H4-1-LED-2P

ENGINEER NO: SF08025S1H4-1-LED-2P

Article No: SP-AP-SC-A322

Version	Revised Chapter	Description	Revised Date	Drafted by	Audited by	ECN No.
A/0	N/A	First Version	2010-8-11			N/A



Contents

1. Main Components List.....	4
2. Multi views and images.....	5
3. Fan Drawing.....	6
3. Airflow Image.....	7
4. Fan Specification.....	8
5. Correlative Certification compliance.....	9



Spire Corp.


1. Main Components List

Item	Components	Part No.	Quantity	Material
1	FAN	0208025S1H4-1-LED-P	1PCS	Plastic
2	fan speed adjustor	04984PM01	1PCS	N/A
3	rubber screw	1080251403	4PCS	Plastic

1. Multi views and images



Picture 1 : Full view



Picture 2 : Top view



Picture 3 : Base view




Picture 4 : Side view



Picture 5: 4Pin




Picture 6: Fan Label

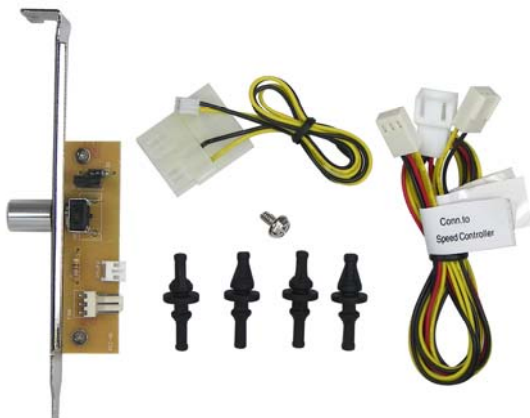


Picture 7: Fittings

2 . Fan Drawing

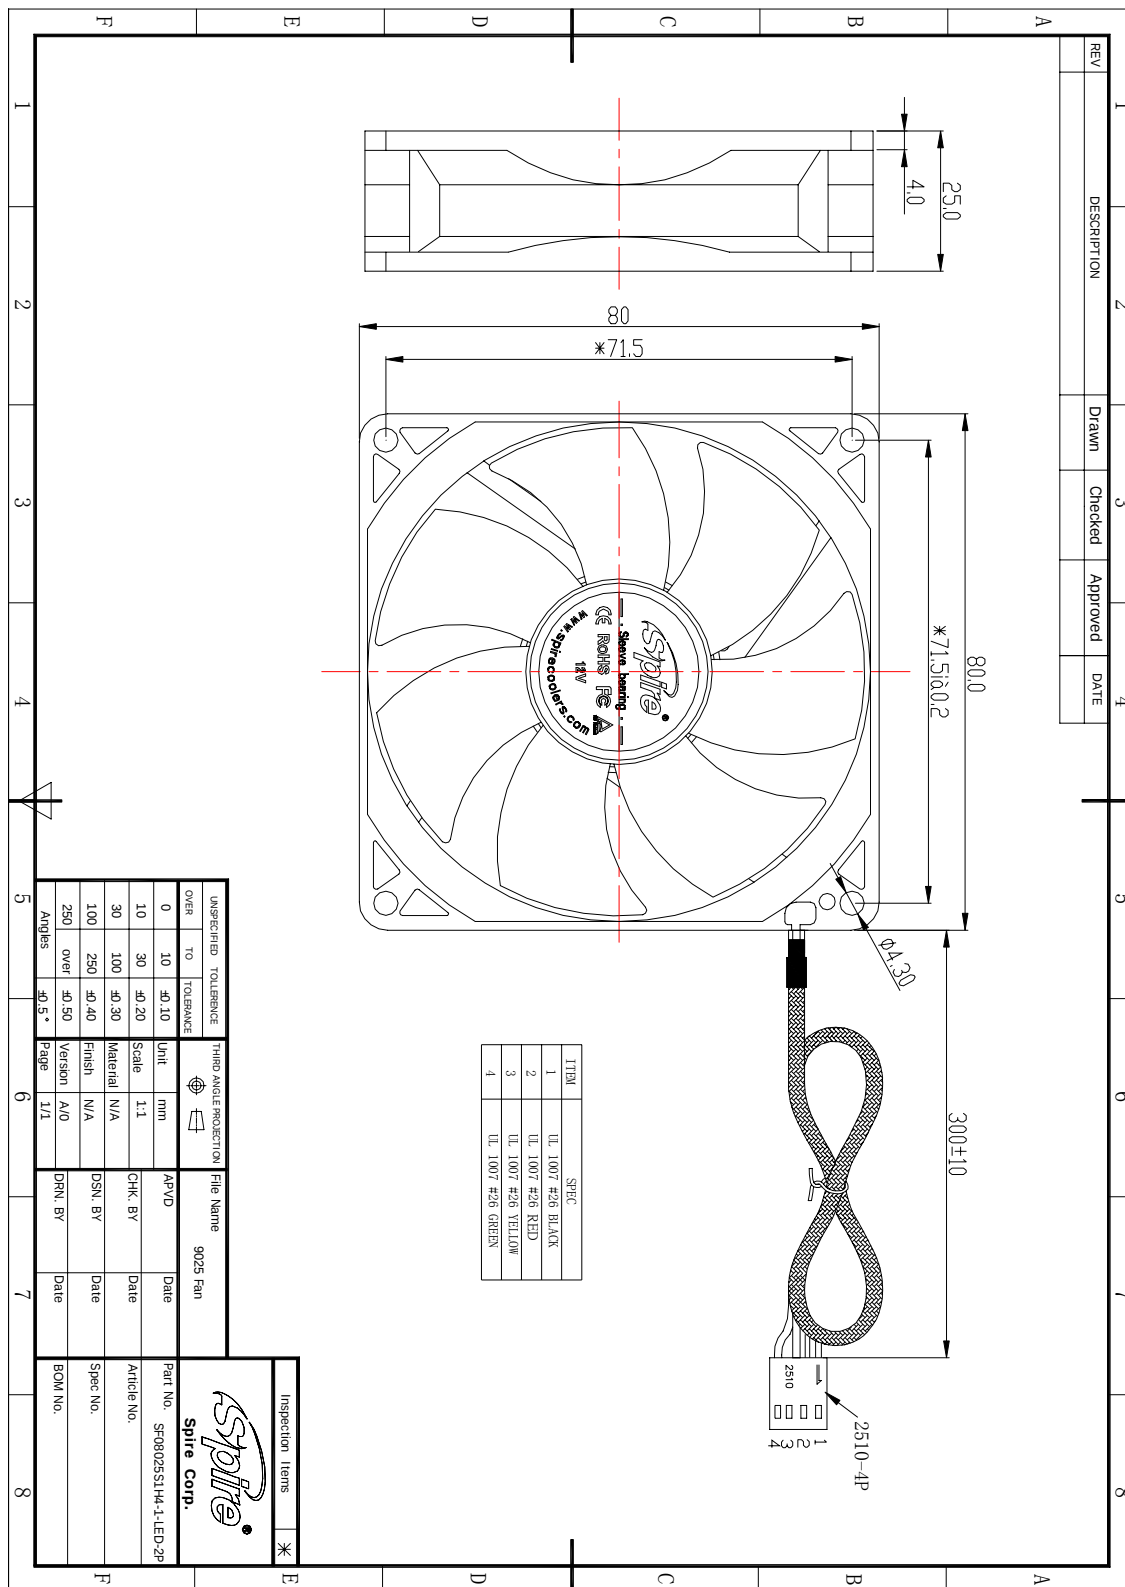



3. Airflow Image

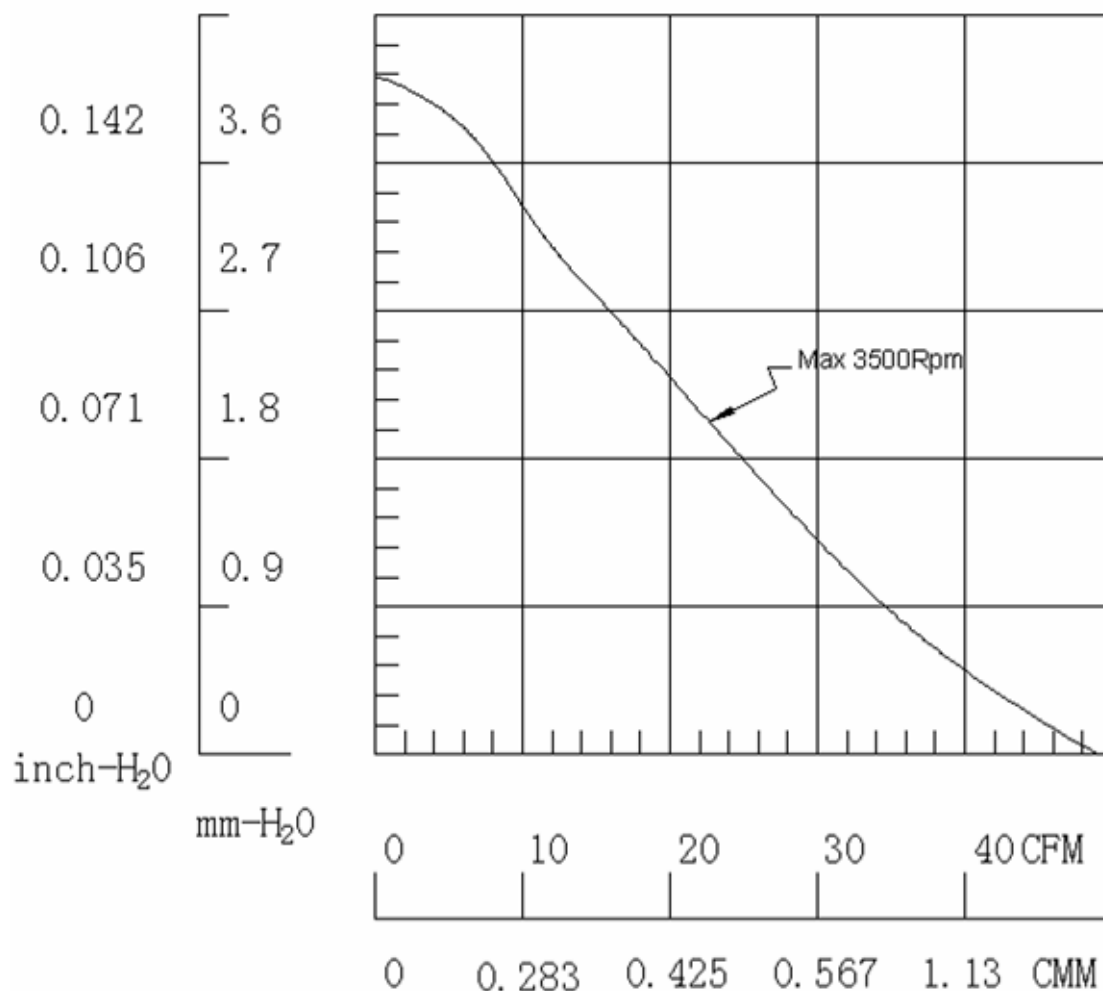



4.Fan Specification:

FAN MODEL: SP08025S1H4-1-LED-P

1. Rated Voltage	: 12VDC
2. Operating Voltage Range	: 10.2 ~13.8VDC
3. Max Rated Speed	: 1000~3500RPM ± 10%
4. Max Static Pressure	: 4.13 mm-H2O
5. Max Air Flow	: 49 CFM
6. Max Rated Current	: 0.23 AMP
7. Max Rated Power	: 2.76 WATTS
8. Noise Level	:10~29 dB(A)
9. Operating Temperature	: 30 to 70 Deg. C
10. Storage Temperature	: -10 to 40 Deg. C
11. Bearing System	: Sleeve Bearing
12.Life hours	: 30,000
13. Connector	: 4 P
14. Weight	: 63.0 g



5. Correlative Certification compliance

Item #	Certification type	Certification Number	Certification listing	Remark
1	EMC	BCT07LC-806E	www.bontek.com.cn	
2	LVD	BCT07LC-806S	www.bontek.com.cn	
3	FCC	ASZ08041007FK	www.aovt.com	
4	ROHS	GZ0804058335/CHEM	www.rohs.cn.com	
5	TUV	R50131773	www.s2.chn.tw.com	